




OM PAK 35 – 150 W digital ignitor with timer and cable

Supply units

Product description

- Series OM ballast
 - Also suitable for high ambient temperatures up to 65 °C
 - Rapid lamp starting and restarting thanks to integrated digital superimposed-pulse ignitor ZRM 2.5 ES/CT
 - Automatic shutdown for a faulty lamp
 - Temperature-protected
 - Low-loss
 - Simple connection of all cables in a generously sized connection compartment; no tools required
 - Halogen-free three-core lamp cable, length 1.0 m
 - With fitted ST-18 socket
- For product data sheet go to www.tridonic.com, or available on request

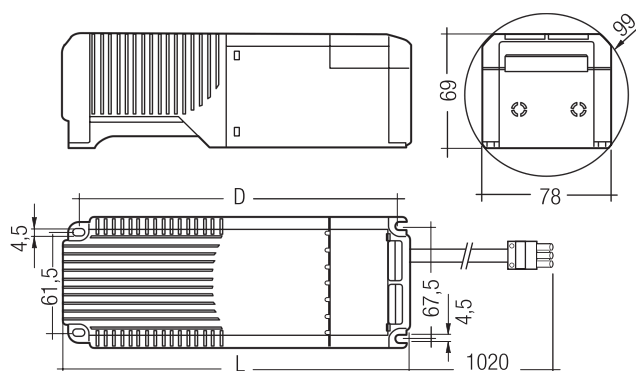

Technical data

Ignitor	ZRM 2,5-ES/CT
Max. cable length to lamp (75 pF/m)	1.5 m



Lamp matrix, page 8

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pcs.
OM PAK 35 M B533 230-250V 50Hz 1200	22116506	1 pieces	84 pieces	1.4 kg
OM PAK 70 M B533 230-250V 50Hz 1200	22116521	1 pieces	84 pieces	1.8 kg
OM PAK 150 M B533 230-250V 50Hz 1200	22116559	1 pieces	75 pieces	3.0 kg

Specific technical data

Lamp wattage	Lamp type	Rated lamp current	Type	Article number	Voltage	Mains frequency	EEL	Length L	Hole spacing D	Ambient temperature ta	Losses	Mains current	λ
35 W	HI	0.53 A	OM PAK 35 M B533	22116506	230 / 240 / 250 V	50 Hz	A3	210 mm	193.5 mm	65 °C	8.6 W	0.22 A	0.95
70 W	HI	1.00 A	OM PAK 70 M B533	22116521	230 / 240 / 250 V	50 Hz	A3	210 mm	193.5 mm	55 °C	15.7 W	0.38 A	0.95
150 W	HI	1.80 A	OM PAK 150 M B533	22116559	230 / 240 / 250 V	50 Hz	A3	260 mm	243.5 mm	50 °C	23.2 W	0.76 A	0.95