


Low Voltage Halogen Lampholders

25.105.4201

GU5.3 / Connector GX5.3

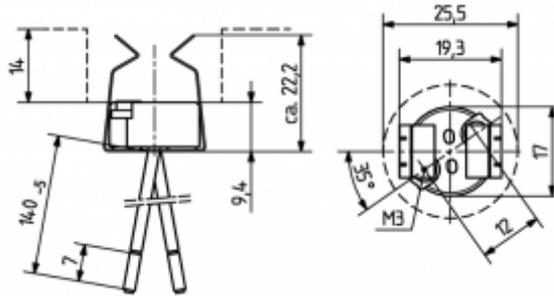

pkg.	wt.	part no.
500	8 g	25.105.4201.00

Connection: Rear cable entry

Wires: Cu, nickel plated 1.0 mm², with ferrule,
Insulation PTFE (max. 250° C), Lead length:
50 mm, mount with thread inserts M 3

Housing: Ceramic
Contacts: Ni

- The method of wiring must be such that no stress or bending motions will be transferred to the contacts, thus reducing the contact / pressure on the lamp pins.

T 300	10 A 50 V
-------	--------------