



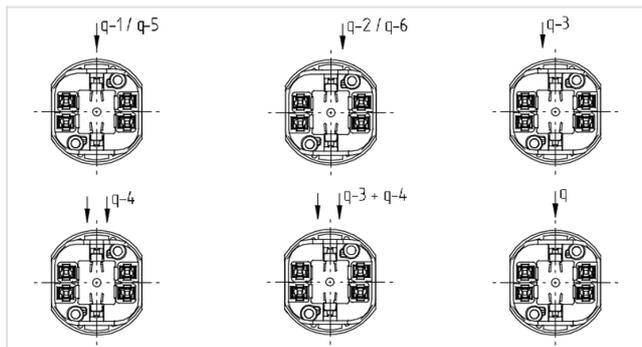


Technik für Licht  
Komponenten · Optik · Automation

# 26.745.1401

Compact Fluorescent Lampholders  
G24 / GX24

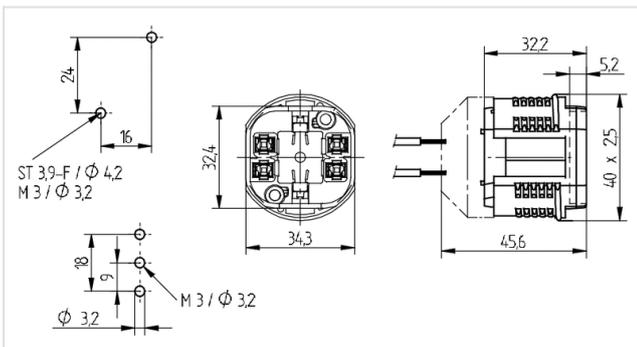

**Color:** weiß  
**FC:** 50  
**Part no.:** 26.745.1401.50



0,5 - 1,0 mm<sup>2</sup>

0,5 - 1,0 mm<sup>2</sup>

T 140

## Description

- Threaded barrel
- 
- Screw mount vertical, diagonal: two holes  $\varnothing$  3.2 mm
- 
- Panel cut-out: 2 holes, distance 16 x 24 for self-tapping screws ISO 1481 - ST 3.9 - F
- 
- Screw mount central, vertical: one hole  $\varnothing$  3.2 mm and 2 anti rotation slots
- 
- Panel cut out: three holes 2 x 9 = 18 mm for screws ISO 1207 - M3
- 
- Rivet mount: we recommend blind rivet  $\varnothing$  3.0 mm according to DIN 7337 (Aluminium / Steel flat round head) max. pull force 500 N
- 
- \*Note: Whilst the version of the lampholder without key is designed and constructed to the same high quality standards as the approved versions, there is no valid approval available that we can apply for.

<b>Short description:</b>	For lamps TC-DEL, TC-TEL
<b>Product name:</b>	Lampholder G24/GX24
<b>LED type:</b>	GX24
<b>Symbol :</b>	140
<b>Farbe:</b>	white
<b>Mounting method 1:</b>	Screw mount
<b>Material:</b>	Housing: PBT
<b>cULus file no.:</b>	E-92235
<b>Weight:</b>	15
<b>Approval:</b>	additional cULus
<b>Key:</b>	q (without key)*
<b>T-Marking:</b>	140
<b>Pkg.:</b>	250