




basicDIM RCL

Control module for combination with ambient light sensor, switch and presence sensor

Product description

- Digital control module with ambient light sensor, motion detector and switch input
- Control module for controlling up to 25 DSI ballasts
- Dimming and switching and saving of the daylight set value via single switch; multiple switches can be connected in parallel
- Saving of the daylight set value lockable
- With the Link Line it is possible to connect up to 20 basicDIM RCL to one system (synchronisation of motion detection) [Ⓢ]
- Mode can be selected via rotary switch
- Input for a maximum of 4 basicDIM sensors
- 5-year guarantee

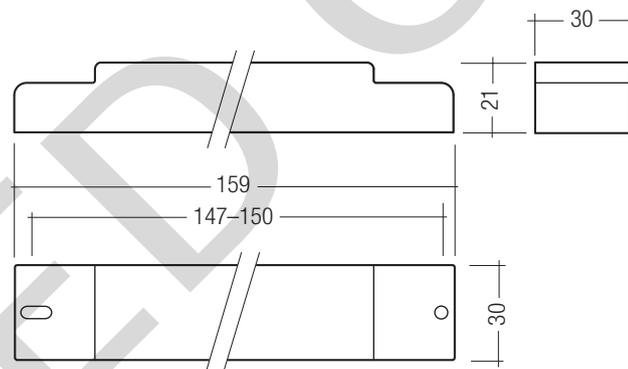

Technical data

Rated supply voltage	220 – 240 V
Mains frequency	50 / 60 Hz
Power	1.5 W
Operating temperature	0 ... +60 °C
Storage temperature	-25 ... +70 °C
Type of protection	IP20

Ordering data

Type	Article number	Packaging carton
basicDIM RCL	86458998	10 pc(s).

Specific technical data

Type	Inputs			Outputs			Link Line	
	Dimming switch	Max. smartDIM sensors	Max. sensor line length	Digital control line DSI	Control output DSI (devices)	Dimming range	Voltage DC at correct mains wiring [Ⓢ]	Number of combinable modules
basicDIM RCL	single	4	10 m	1	25	1 – 100 %	15 V	20

[Ⓢ] To ensure the functionality of the Link Line the phase and the neutral wires have to be connected as shown on the device.

[Ⓢ] If reverse polarity is applied to mains, mains voltage is at the Link Line and the function of Link Line will be affected.

RoHS

ACCES-
SORIES


basicDIM Sensor 5DP 19f

Product description

- Optional ambient light sensor and motion detector for basicDIM RCL
- Compact low-profile dimensions for luminaire installation
- With plug terminal
- 5-year guarantee

Technical data

Light measurement at the sensor head (detection)[Ⓞ] 5 – 500 lx

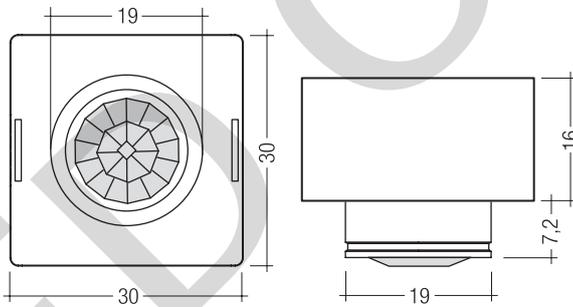

Ordering data

Type	Article number	Packaging carton	Weight per pc.
basicDIM Sensor 5DP 19f	86459173	50 pc(s).	0.06 kg

[Ⓞ] The measured value at the sensor head corresponds to approx. 10 to 1,500 lux on the surface measured.

RoHS

ACCES-
SORIES

Accessories for basicDIM Sensor 5DP 19f

Product description

- Optional for increasing the detection range of the motion sensor for basicDIM Sensor 5DP 19f
- 5-year guarantee



Ordering data

Type	Article number	Packaging carton	Weight per pc.
smartDIM Mirror	28000851	50 pc(s).	0.002 kg

RoHS

ACCES-
SORIES


basicDIM Sensor 5DP 41rc

Product description

- Optional ambient light sensor and motion detector for basicDIM RCL
- Ceiling installation
- 5-year guarantee

Technical data

Light measurement at the sensor head (detection)^① 5 – 500 lx



Ordering data

Type	Article number	Packaging carton	Weight per pc.
basicDIM Sensor 5DP 41rc	86459115	20 pc(s).	0.06 kg

^① The measured value at the sensor head corresponds to approx. 10 to 1,500 lux on the surface measured.

RoHS

ACCES-
SORIES


basicDIM Sensor 5DP 41rs

Product description

- Optional ambient light sensor and motion detector for basicDIM RCL
- Surface mounting
- 5-year guarantee

Technical data

Light measurement at the sensor head (detection)^① 5 – 500 lx





Ordering data

Type	Article number	Packaging carton	Weight per pc.
basicDIM Sensor 5DP 41rs	86459116	20 pc(s).	0.06 kg

^① The measured value at the sensor head corresponds to approx. 10 to 1,500 lux on the surface measured.

Product description

- 5-year guarantee

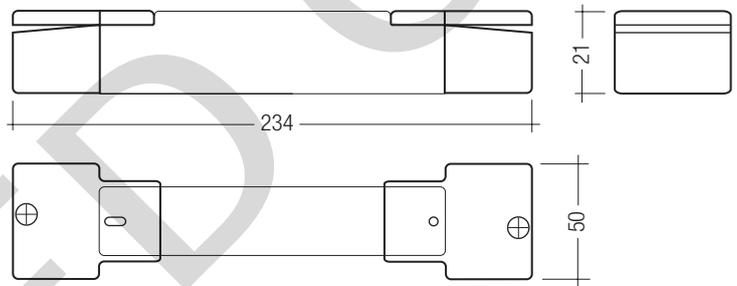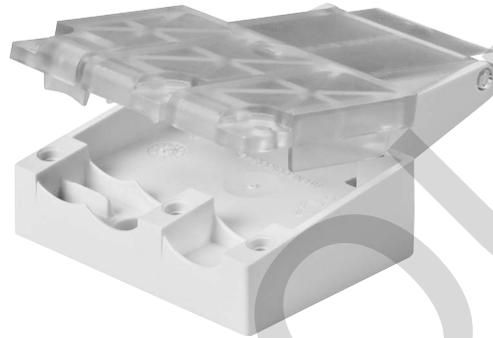

Ordering data

Type	Article number	Packaging carton
Strain-relief set	28000881	10 pc(s).

Standards

EN 61547
EN 61347-1
EN 61347-2-11
EN 55015

Glow-wire test

according to EN 61347-1 passed.

Rotary switch BASIC DIM RCL

Pos.	Motion detection		Light regulation	
	Mode	Delay time	Mode	Light Level Set
0	on	20 min	on	manual mode
1	on	20 min	on	automatic mode
2	on	30 min	on	manual mode
3	on	40 min	on	manual mode
4	on	adaptive	on	manual mode
5	on / never off (= 10 %)	20 min	on	manual mode
6	on	adaptive	off	–
7	on	20 min	off	–
8	only off	10 min	on	manual mode
9	only off	20 min	on	manual mode
A	only off	30 min	on	manual mode
B	only off / never off (= 10 %)	20 min	on	manual mode
C	only off	20 min	off	–
D	off	–	on	manual mode
E	off	–	on	automatic mode
F	test mode (15 s delay time)			

Delay time

The disconnection delay time for the motion detector can be set by means of a rotary switch. The option of switching between a fixed delay time and an adaptive delay time opens up application-specific usage. An adaptive delay time (between 4 minutes and 20 minutes) offers optimum energy consumption. "Adaptive" means that the delay time is automatically adjusted according to the frequency with which presence in the room is detected.

At the end of the delay, the basicDIM RCL starts dimming the luminaires down to 1 %. The luminaires are then switched off. Dimming down to 1 % takes one minute.

Adaptive delay time

The adaptive delay time function calculates the optimum delay time. This may be between 4 and 20 minutes. The delay time depends on the frequency of motion detection. For infrequent detection the delay time is 4 minutes. The time is lengthened step by step, the more time the sensor is passed.

After the luminaires have been switched off by the motion detector the time is reset and starts again at 4 minutes.

only off

This function means the motion detector can be used more efficiently. If the "only off" function is set the motion detector only switches the connected luminaires off. The luminaires are switched on manually via the connected external switch.

Light level set**Automatic mode**

Every time the light value is changed with a long press a new setpoint light value is automatically updated and stored.

Short press (> 50 – 600 ms)	ON / OFF
Long press (> 600 ms)	Setpoint light value is permanently changed

Manual mode

A change in the light value deactivates lighting regulation until manual confirmation (2x short press) on the connected switch.

Short press (> 50 – 600 ms)	ON / OFF
Long press (> 600 ms)	A change in the light value deactivates lighting regulation only temporarily. As soon as the luminaire has been automatically switched on again (motion detection) or manually switched off and on again, regulation is activated again.
2x short press	The overwritten setpoint light value is stored (luminaire acknowledges by flashing twice), lockable (see operation instruction)

Jumper settings basicDIM RCL


The set point saving can be locked or unlocked via switches.

 Set point saving free

 Set point saving locked

voltage push to make switch (see wiring instructions on the next page).

basicDIM RCL has an internal memory that stores the last dimmer value in the event of a power outage. If, for example, a system is on standby it will continue to be on standby when power returns after an outage.

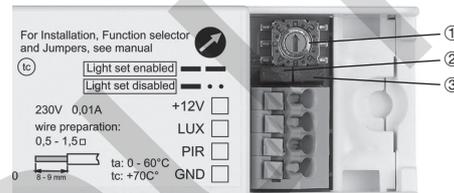

① Rotary switch operation mode

② Reserved for future function.

③ The jumper has to be set to ensure the function. The activation / Deactivation set point saving (ambient light regulation) via switch

never OFF

After 20 minutes the lighting is dimmed to 10 % with a fade time of 1 minute. The luminaires are not switched off but remain at a basic brightness of 10 %.

Bright-Out and Bright-In

If the nominal illuminance (e.g. 500 lux) is exceeded for 10 minutes by more than 150 % (e.g. 750 lux), the luminaires are switched off even if motion is detected.

The lighting is then only switched on in response to detected motion if the current illuminance does not exceed the value stored in the sensor.


Installation

The detection zone can be extended by connecting further basicDIM sensors.


- Up to 4 basicDIM sensors can be connected in parallel. This does not reduce the number of controllable DSI units.
- max. cable length 10 m to the last sensor
- basicDIM RCL cannot be operated without sensor
- DSI is not SELV. The installation instructions for mains voltage therefore apply.
- Link Line is not SELV. If reverse polarity is applied to mains, mains voltage is at the Link Line and the function of Link Line will be affected.
- The maximum cable length (250 m) of the DSI control signal and the Link Line (for a cable cross-section of 1,5 mm²) must not be exceeded.
- Any number of push to make switches may be connected in parallel to the inputs T.
- Do not connect standard switches to the input T.

Cable types and cable cross-sections

basicDIM RCL:
Solid wire with a cable cross-section of 0.5 mm² to 1.5 mm².



basicDIM Sensor:
Solid wire with a cable cross-section of 0.12 mm² to 0.5 mm².




Link Line


With the Link Line it is possible to connect up to 20 basicDIM RCL to one system.

Link Line is used for synchronisation of the motion detection. The motion signal will be relayed to all connected basicDIM RCL!
The ambient light control will be conducted independently of each basicDIM RCL. To guarantee the Link Line function, it is necessary to connect the mains voltage as it is shown in the label.

A) with a basicDIM RCL

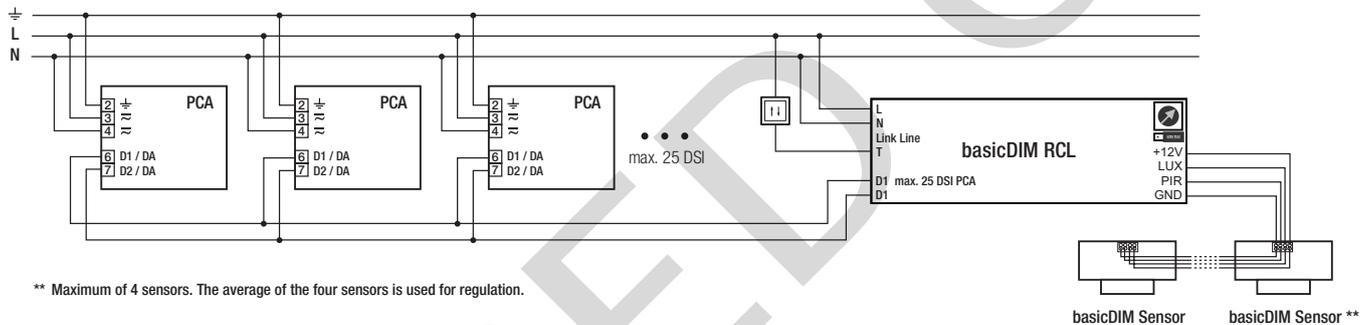

B) with several basicDIM RCL synchronized via Link Line

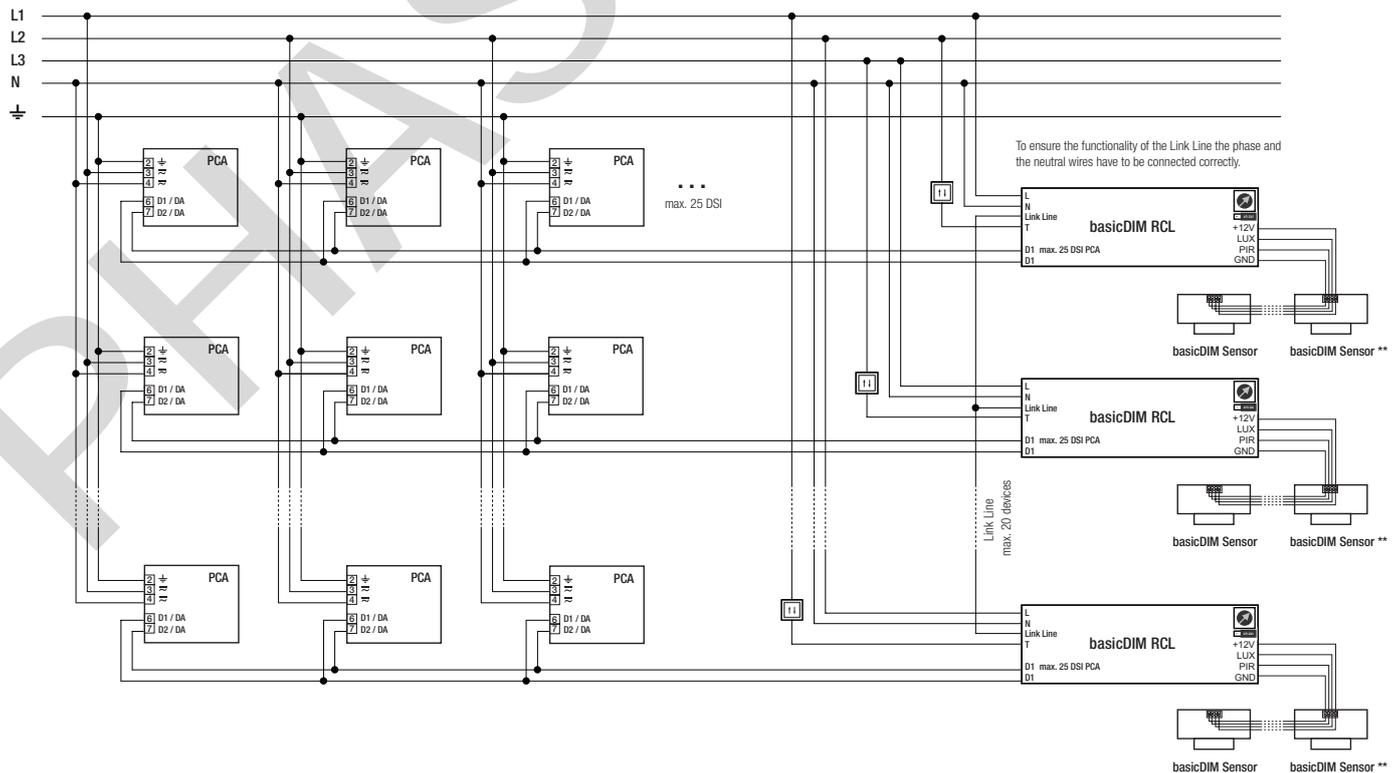

basicDIM Sensor 5DP 19f
Luminaire installation sensor/lighting controller/motion detector



The compact basicDIM Sensor 5DP 19f contains a PIR (passive infra-red) motion detector and a light sensor for constant light regulation. The terminal technology selected offers simple wiring to a further basicDIM sensor to increase the detection zone of the motion detector.

With the aid of the smartDIM MIRROR, available as an accessory, the "monitored" zone can be focused or extended in a certain direction.



Light regulation

Precise light measurement via photo diodes.

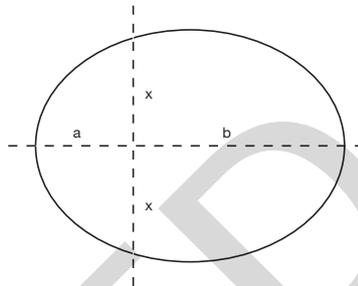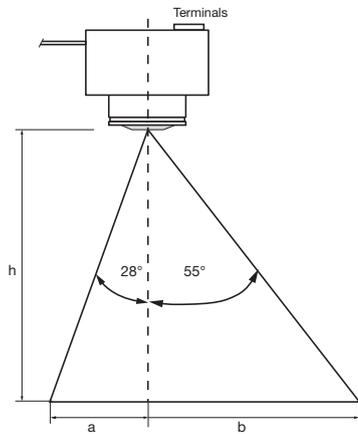


h	a	b	x
1.70 m	0.90 m	2.43 m	1.7 m
1.90 m	1.01 m	2.71 m	1.9 m
2.10 m	1.12 m	3.00 m	2.1 m
2.30 m	1.20 m	3.28 m	2.3 m
2.50 m	1.33 m	3.57 m	2.5 m
3.00 m	1.60 m	4.28 m	3.0 m
3.50 m	1.86 m	5.00 m	3.5 m
4.00 m	2.13 m	5.71 m	4.0 m
5.00 m	2.66 m	7.14 m	5.0 m


1 m = 1,094 yd

Presence detection

Detection area: 46°
Scope: 2.5 m presence detection
5 m motion detection

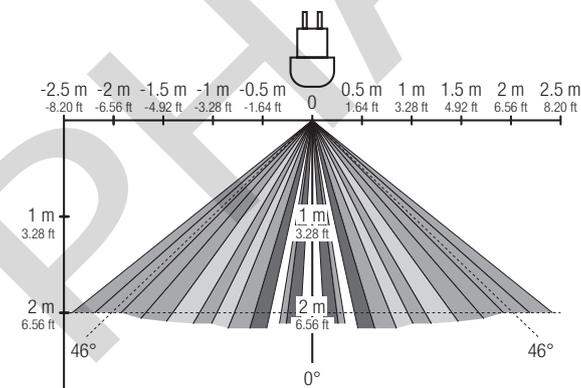

Detection range at 2 m distance

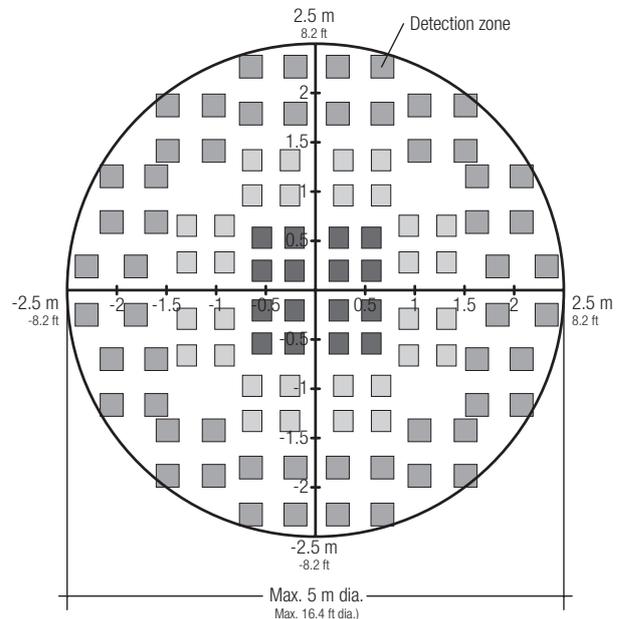


Installation instructions

Simple and straight forward installation using a purpose built mounting clamp. These mounting clamps can be inserted into the slots in the sensor housing. The mounting clamps are available in 2 different versions (suitable for screw fix or spot welding).


Mounting clamps are not delivered with the product.

The mounting clamp can be found on www.vogt.ch by searching for "38421sbae.80".



Applying the mounting clamps to the sensor:

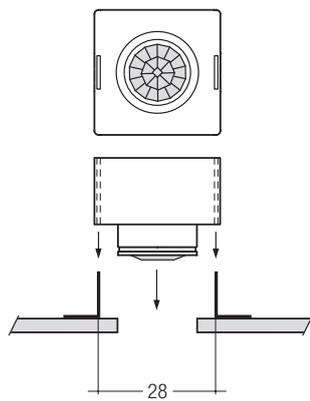

With long mounting clamps the sensor can be adjusted up or down so the sensor edge is flush with the surface of the luminaire.

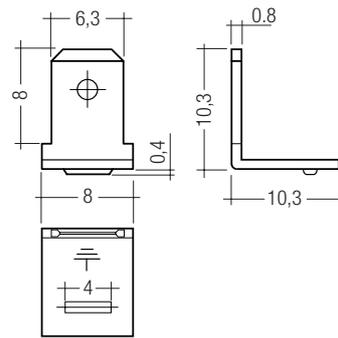


example for weldable mounting clamps

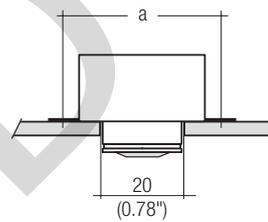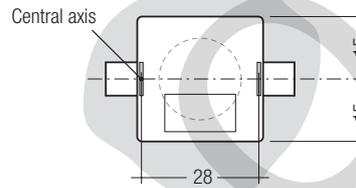

Dimension a is dependent on the type of bracket used.

basicDIM Sensor 5DP 19f Zubehör: smartDIM MIRROR


The clip on smartDIM MIRROR allows the detection area of the PIR sensor to be focused and extended up to 5 m. The mirror will shield one side of the sensor detection zone and therefore reduce sensitivity in that plane.

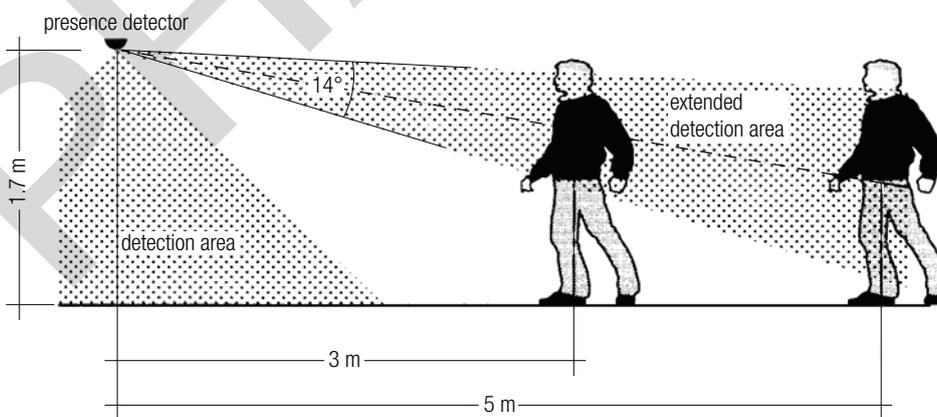

basicDIM Sensor 5DP 41rs / basicDIM Sensor 5DP 41rc
Ambient light sensor and PIR sensor



basicDIM Sensor 5DP 41rs

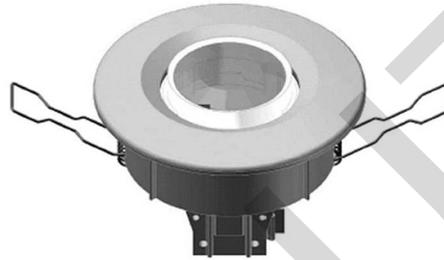

basicDIM Sensor 5DP 41rc


Ceiling mounted / Surface mounted sensor measuring ambient light level and movement detection. Different settings can be chosen via the basicDIM RCL sensor module.

Light regulation



Precise light measurement via photo diodes.

h	r
1.7 m	1.4 m
1.9 m	1.6 m
2.1 m	1.8 m
2.3 m	1.9 m
2.5 m	2.1 m
2.7 m	2.3 m
3.0 m	2.5 m
3.5 m	2.9 m
4.0 m	3.4 m
5.0 m	4.2 m

1 m = 1,094 yd

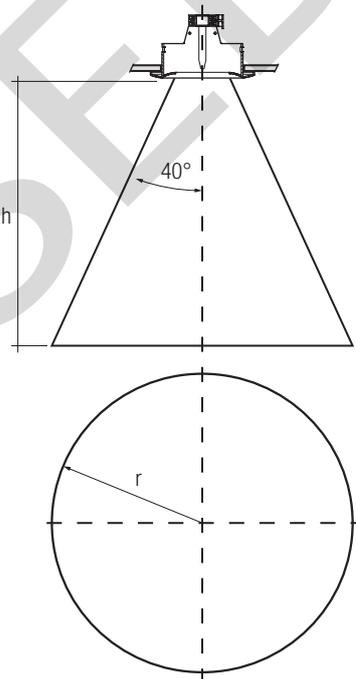

Presence detection

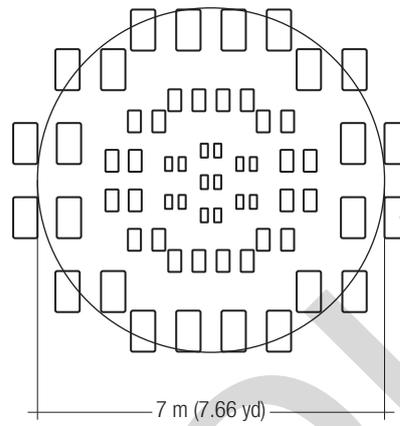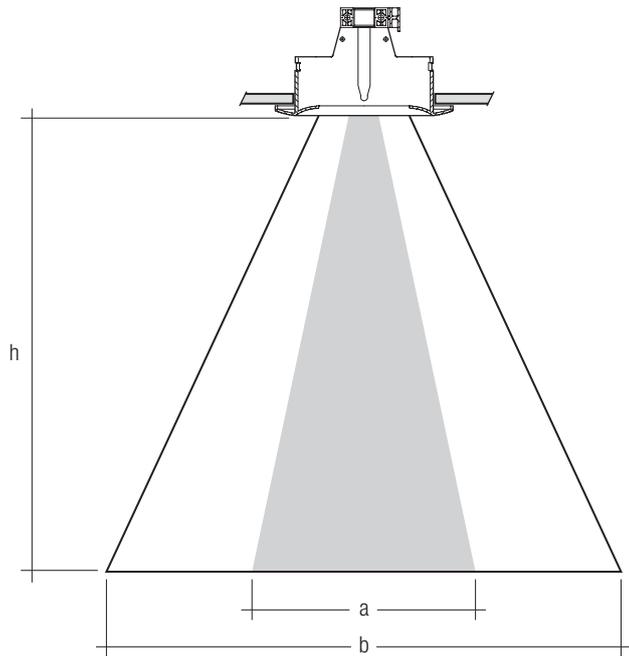

Coverage pattern at 2.7 m (2.95 yd) mounting height.

a ... presence detection area
b ... movement detection area

h	a	b
2.5 m	4.0 m	6.0 m
2.7 m	3.0 m	7.0 m
3.0 m	2.0 m	7.5 m
3.5 m	-	8.0 m
4.0 m	-	10.0 m
5.0 m	-	12.5 m

1 m = 1.094 yd