









## DATASHEET



IP00	LEDtape RGB 1000LM 15W 24V 5M G2
Code	W1005-RGB-5M-G2
	7506490
	3201184
	4127410
	7350102530428



IP68	LEDtape RGB 1000LM 15W 24V IP68 5M G2
Code	W1005-RGB-IP68-5M-G2
	7506491
	3201185
	4127411
	7350102530435

## HIGHLIGHTS

- Short pitch flexible RGB LED-tape for professional lighting applications with high light output
- Available in IP00 and IP68-version
- Multichip RGB LEDs placed under the same lens to achieve high quality colour mixing – no rainbow effects
- Optimized Individual color calibration to generate white light from RGB LEDs
- Reflective white double-layered PCB for optimal system efficiency
- High quality adhesive 3M-tape on backside for easy mounting on common surfaces
- Long lifetime: L70 = 50.000h ①
- Optimized for high resolution digital dimming 0.1-100% and RGB control using Welight LED-driver W71XX-series.
- Stable photometrics in combination with wide input voltage range 22-26 VDC

## Accessories

- Solder-free connectors and bridges (included)
- Aluminium profiles for linear and corner applications
- Wide variety of lenses and covers  
15°/30°/60°/120°/Asymmetric/Batwing
- Fixed or adjustable mounting brackets
- Optimised drivers to fit every need and application

## Technical Data

 p. 2

## Accessories

 pp. 3

## Mounting Instructions

 pp. 6

## TECHNICAL DATA

### Packaging


Full carton	20 pcs
Weight per pc	IP00: 320 g   IP68: 700 g
Box dimensions	250 x 250 x 30 mm

### Electrical ①

Supply voltage (VDC)	24
DC Voltage Range ④	22-26V
Power (W) per m	15
Current (mA) per m	625
Supply Cable	L = 1 m (both ends) AWG20 UL standard BK (Common +) RD (Red -) GR (Green -) BL (Blue -)

### Dimensional ②

Length (L)	5 m
Max length in series	5 m
Min Bending Radius	IP00: 30 mm IP68: 50 mm
Width (W)	IP00: 10 mm IP68: 12 mm   Incl. Endcap: 14 mm
Height	IP00: 1,4 mm IP68: 4,5 mm   Incl. Endcap: 6,5 mm
Cutting length (C)	50 mm
Pitch distance (P)	8 mm

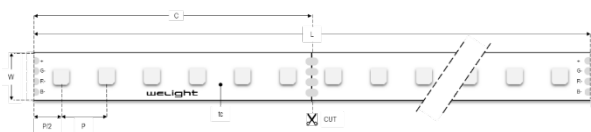

### Temperature and Lifetime


Performance Temp Rating (Tp)	65 °C
Operating Temp Range (Ta) ⑤	-35/+50 °C
Max PCB Temp (Tc)	75 °C
Storage Temp	-35/+80 °C
L70F10 @Tp	50 000 h
L90F10 @Tp	35 000 h
Adhesive	3M VHB 5-year warranty
Warranty Period @Tp	5 years

### Safety & Compliance

Constant Current IC	Yes, bipolar IC
Insulation Voltage	0,5kV DC 10mA 60sec
IEC Standards	IEC 62031 IEC 62471 IEC 62717 IEC 61000-4-2
ESD Class	1
Risk group (EN 62471:2008)	1
Classification acc. to IEC 62031	Class III
Energy Declaration (EEEL)	A+   10 kWh / 1000h

### Optical ① ③

Luminous Flux (lm) per m ⑥	1 000
Luminous Intensity (cd) per m	176
Beam Angle	120
LED package	3838
LED quantity per m	120
Red wavelength (nm)	620 - 625
Green wavelength (nm)	520 - 525
Blue wavelength (nm)	465 - 470
CRI R1-R8 (RGB@100%)	80

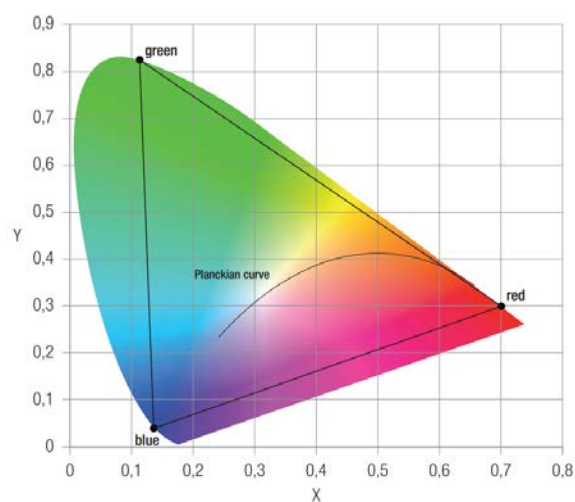

① Tolerance range for electrical and optical data ±10%

② Tolerance range for dimensional data ±1%


③ All values for ta = 25 °C / tc = 65 °C

④ Measured at the beginning of the LEDtape. Exceeding the maximum operating voltage leads to an overload. This may result in a significant reduction in lifetime or even destruction of the tape. If voltage at the beginning of the LEDtape is too low this may result in significant reduction or uneven light output.


⑤ Self-cooling at ta ≤ 35 °C

⑥ Lumen can be a misleading value for monochromatic RGB light sources. Luminous Intensity (cd) is a better indication of the light intensity.

## WIRING

Each reel of LED-tape is delivered with colour coded connection cable in each end, L = 1 m, 4 x 0,5 mm<sup>2</sup>. Do not connect more than 5 meters of the LED-tape in series and make sure that the voltage is  $\geq 22V$  at the beginning of the LEDtape. When connecting several sections in parallel please refer to  **Digital Dimmable Drivers** for the max length allowed per Driver.

Cable Colour	Function	Driver Output
BLACK	+ Common	+
RED	- Red	1 -
GREEN	- Green	2 -
BLUE	- Blue	3 -

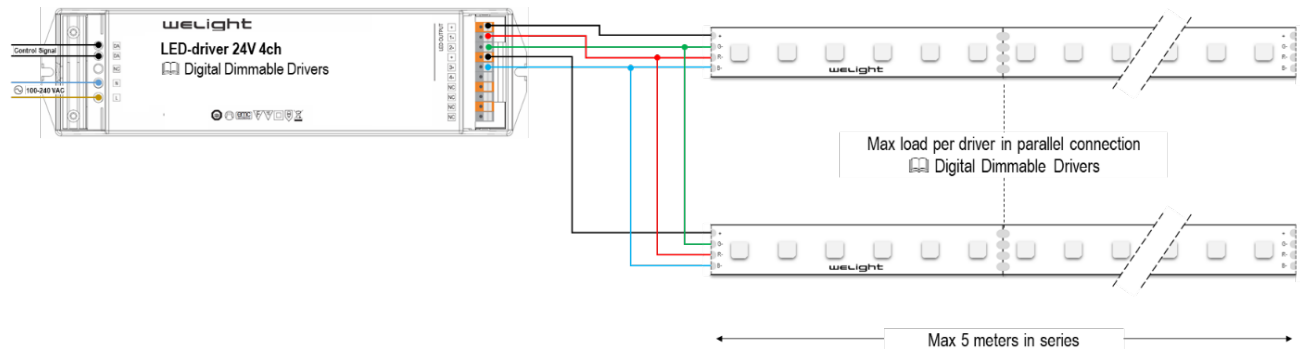

## APPLICATION NOTES

### Using LEDtape RGB with lenses & covers

Allow for  $\geq 20mm$  distance from the lens to the surface you want to illuminate to achieve an optimal colour mix of the different colours. Without any lens, the equivalent distance is  $\geq 30mm$ .

When using the narrow beam lens (24166405), we recommend single colour operation for optimal optical effect, i.e. only light one colour at the time. When mixing colours with the narrow beam lens, please allow for  $\geq 2m$  distance from the lens to the surface you want to illuminate to achieve an optimal mixed colour.


## DIGITAL DIMMABLE DRIVERS

Weight offers a range of suitable LED-drivers especially designed for RGB applications.



Control Signal	Art. Code	Driver Type	Max length per driver
DALI DT6	W7101	LEDdriver LCV 100W 24V 1-4CH DALI SR	6.7 m
DALI DT8 RGBW	W7101-RGBW	LEDdriver LCV 100W 24V DALI DT-8 RGBW SR	6.7 m
DALI DT8 XY	W7101-DT8-XY	LEDdriver LCV 100W 24V DALI-2 DT8 RGBW XY SR	6.7 m
KNX	W7102	LEDdriver LCV 100W 24V 1-4CH KNX SR	6.7 m
DMX	W7103	LEDdriver LCV 100W 24V 1-4CH DMX SR	6.7 m

## CABLE & CONNECTION ACCESSORIES

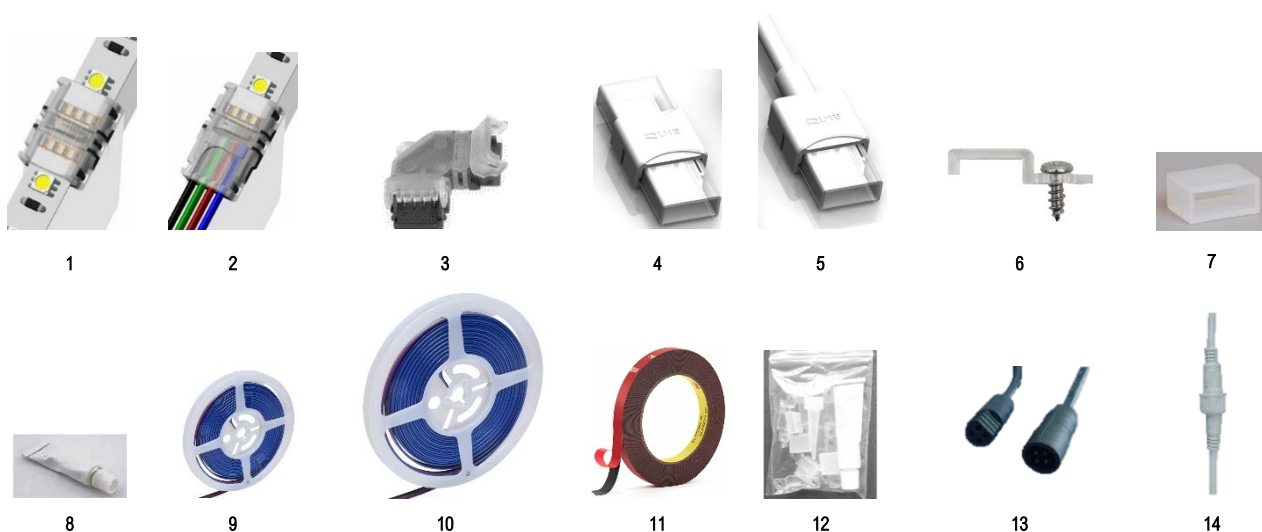

Pic	Type	Art. Code	Description	Included	Suitable for LEDtape	
					IP00	IP68
1	LEDtape Connector RGB Strip-Strip	W8444	Connect RGB strips to each other	1 pc	✓	✗
2	LEDtape Connector RGB Strip-Cable	W8445	Connect RGB strip to a 4-wire cable (cable not included). Max cross section AWG20 (0,5mm <sup>2</sup> ).	1 pc	✓	✗
3	LEDtape Connector RGB Strip-Corner-Strip	W8450	Connect RGB strips in a 90° angle. Suitable for corners.	–	✓	✗
4	LEDtape Connector RGB IP Strip-Strip	W8446	Connect RGB IP68 strips to each other ⚠	1 pc	✗	✓
5	LEDtape Connector RGB IP Strip-Cable	W8447	Connect RGB IP68 strip to a cable (20cm cable included) ⚠	1 pc	✗	✓
6	LEDtape Mounting Clip	W8430	Mounting clip with single screw for IP00-rated LEDtape	10 pcs	✓	✗
6	LEDtape Mounting Clip IP68	W8431	Mounting clip with single screw for IP68-rated LEDtape	10 pcs	✗	✓
7	LEDtape IP Endcap	W8432	Suitable for sealing the end of a cut LEDtape IP68. Use with W8433.	5 pcs	✗	✓
8	LEDtape Silicon Tube with tip	W8433	Suitable for sealing the end of a cut LEDtape IP68. Can be used together with W8432 for optimal protection.	1 pc	✗	✓
9	LEDcable RKUB 4X0.5 AWG20 Bk/G/Rd/Bl 6m	W8420	Connection cable for RGB strip, 6m reel	–	✓	✓
10	LEDcable RKUB 4X0.5 AWG20 Bk/G/Rd/Bl 100m	W8424	Connection cable for RGB strip, 100m reel	–	✓	✓
11	LEDtape 3M VHB Adhesive 10mm 33m reel	W8449	3M VHB tape for repairing or replacing the adhesive on the back of LEDtape IP00 and IP68. Pre-cut to fit PCB width 10mm. Reel length 33m.	–	✓	✓
12	LEDtape IP Assembly Kit 10	W8901	Endcaps, Mounting Brackets & Silicon	–	✗	✓
13	LEDaccessory RGB CON IP20 kit F+M	W8412-A2	RGB connector kit with female and male plug incl. 30cm cable, black	–	✓	✗
14	LEDaccessory RGB CON IP68 kit F+M	W8411-A4	RGB connector kit IP with female and male plug incl. 30cm cable, white	–	✗	✓

⚠ When properly applied the overall IP-rating of the solution will be IP67.

## PROFILE SYSTEMS & LENSES

Start by selecting an aluminium **profile (A)** and a suitable **lens cover (B)** and then add optional **accessories (C)**.

(A)



1

2

3

Optional accessories

Pic	Type	Art. Code	L (mm)	W (mm)	H (mm)	W (mm) incl. lens cover	H (mm) incl. lens cover	Application	Lens Cover	End Cap	Fixed Mount	Adjustable Mount
1	Z200-2	24166148	2000	18	9	21	16	Corner	✓	✗	✗	✗
2	Z201-2	24166149	2000	18	9	21	16	Linear Slim	✓	✓	✓	✗
3	Z22W-2	24166150	2000	18	16	21	24	Linear	✓	✓	✓	✓

(B)



1

2

3

4

5

6

7

Profile

Pic	Type	Art. Code	L (mm)	Mounting Method	Typ. application	Z200-2	Z201-2	Z22W-2
1	15°	24166405	2000	Slide-on	Wall wash	✓	✓	✓
2	30°	24166409	2000	Slide-on	Wall wash	✓	✓	✓
3	60°	24166410	2000	Slide-on	Shelf/Cabinet	✓	✓	✓
3	90°	24166411	2000	Slide-on	Shelf/Cabinet	✓	✓	✓
4	30° x 60°	24166412	2020	Slide-on	Asymmetric	✓	✓	✓
5	Batwing	24166123	2000	Snap-on	Side-emitting	✗	✗	✓
6	120°	24138743	2000	Snap-on	Accent / Cove	✓	✓	✓
7	Opal	24138742	2000	Snap-on	Accent / Cove	✓	✓	✓

(C)



1

2

3

4

5

Profile

Pic	Type	Art. Code	Z200-2	Z201-2	Z22W-2
1	End cap Grey PMMA	24166334	✗	✓	✗
2	End Cap Aluminium	24139174	✗	✗	✓
2	End Cap Aluminium Cable Entry	24139173	✗	✗	✓
3	Mounting Bracket 0°	88166859	✗	✓	✓
4	Mounting Bracket 15°	88167372	✗	✓	✓
4	Mounting Bracket 30°	88167373	✗	✓	✓
4	Mounting Bracket 45°	88167374	✗	✓	✓
4	Mounting Bracket 60°	88167375	✗	✓	✓
5	Mounting Bracket Adjustable	24166024	✗	✗	✓


## LEDtape Indoor Series IP00

INSTRUKTIONER  
INSTRUCTIONS  
ANLEITUNG  
ISTRUZIONI  
INSTRUCCIONES




### INSTALLATION

1

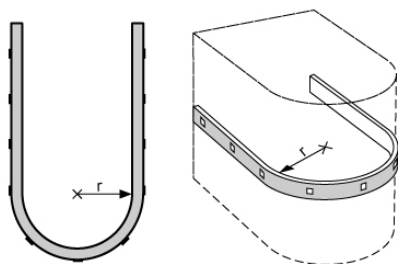

Never bend the LEDtape at a radius smaller than 30 mm.

2

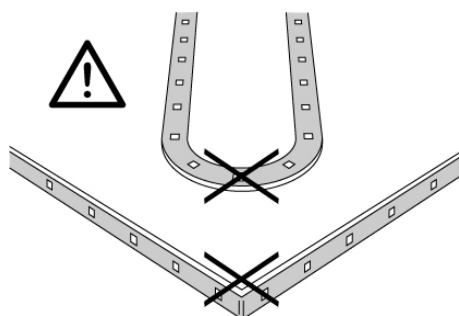


Assembly must not damage or destroy conducting paths on the PCB.

3

#### Perform the Pre-connection Checklist:


- ✓ Maximum length connected in series:  
→ Datasheet | Wiring
- ✓ Polarity and Cable Colour Coding:  
→ Datasheet | Wiring
- ✓ Maximum length per driver:  
→ Datasheet | Digital Dimmable Drivers

4

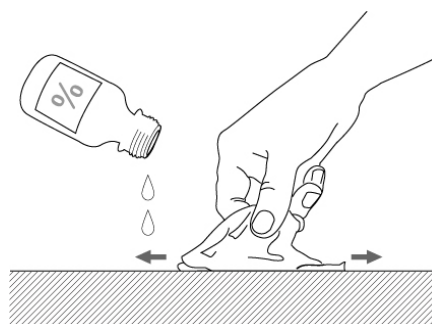


The fixing/cooling surface must be properly cleaned to remove grease, dirt and silicon before application, e.g. using Isopropyl alcohol.

5

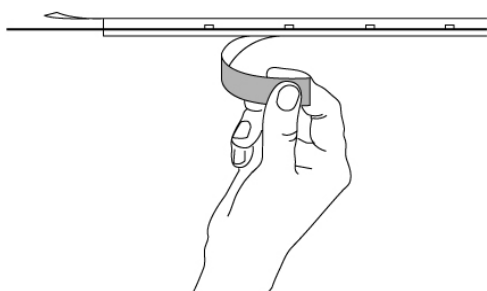

Remove the adhesive tape from the backside and fix the LEDtape on the cleaned fixing/cooling surface.


6

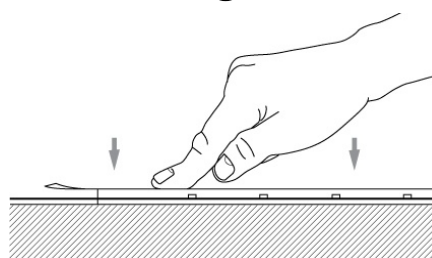

When fixing the LEDtape to a surface, apply an even but gentle pressure and try to avoid applying pressure directly on the LED itself (the maximum allowed pressure is 20 N/cm<sup>2</sup>).


After assembly always check that the entire length has attached properly to the surface and that there is no air pockets underneath.

7

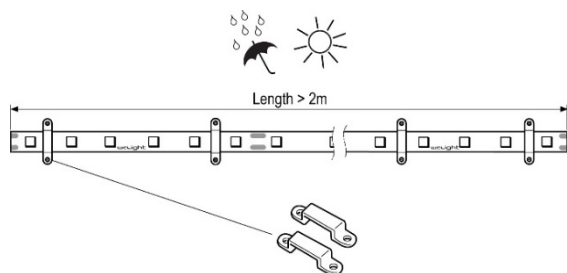

If the total length is longer than 2 meters it is recommended to use the included screw mounting clips in addition to the adhesive tape.


8

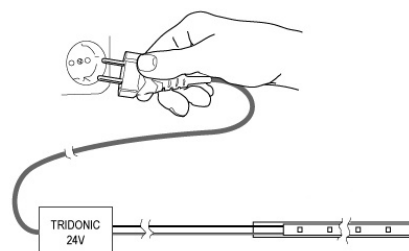

Always use our approved drivers and controls to power the LEDtape. If the wrong type of driver is used the product warranty is void.


→  Datasheet | Digital Dimmable Drivers

9

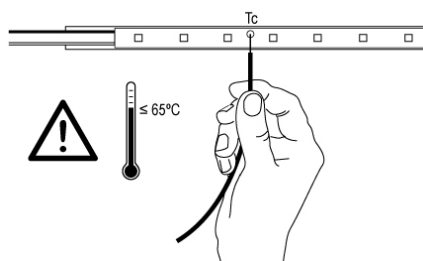


The temperature on the surface of the LEDtape (Tc) may under no circumstances be higher than 65 °C if the expected lifetime of the LEDtape is to be met.


## CUT & SOLDER



The LEDtape is separable at the middle of every solder pad with the full function of each LED segment. It is only allowed to cut at the indicated cutting line.



Always cut the LEDtape in a straight line – 90° in relation to the PCB edges. Use Welight's official connection accessories to split, connect, and bridge the LEDtape.

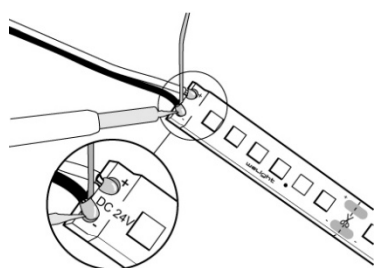

If you need to solder the LEDtape, pre-tin the cables only. Soldering temperature max 300 °C for 4 seconds.


For details on how to solder an IP00 LEDtape, please watch this VIDEO TUTORIAL:





## LEDtape RGB Indoor Series IP00

KOPPLINGSDON  
CONNECTORS  
VERBINDER  
CONNETTORI  
CONECTORES



### STRIP TO CABLE

1




Cut the LEDtape in the middle of the solder pads.

2




Peel off approx. 1 cm of the adhesive tape from the back of the PCB.

3




Open the cap as much as possible and insert the LEDtape all the way to the back of the connector.

4

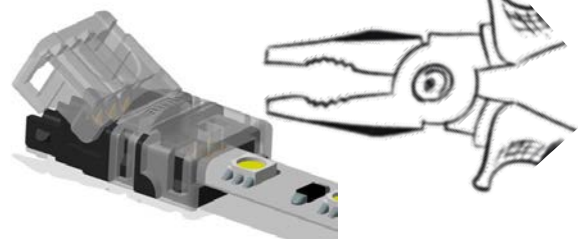


Use a pair of flat pliers to press down on each side of the cap until they lock in position. A "CLICK" can be heard when the pins are locked.

5



Insert the cable all the way to the back of the connector. Make sure you **match the POLARITY** of the LEDtape before locking the connector in place.

6



Use a pair of flat pliers to press down on each side of the cap until they lock in position. A "CLICK" can be heard when the pins are locked.



## STRIP TO STRIP

1




Cut the LEDtape in the middle of the solder pads.

2




Peel off approx. 1 cm of the adhesive tape from the back of the PCB.

3



Open the cap as much as possible and insert the LED-strip all the way to the back of the connector.

4

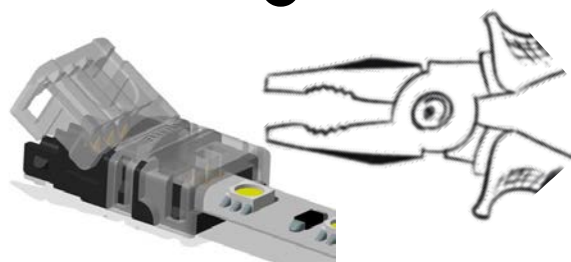

Use a pair of flat pliers to press down on each side of the cap until they lock in position. A "CLICK" can be heard when the pins are locked.

5



Repeat steps 1-4 for the other connecting end of the LEDtape. Make sure you check that both ends are facing the **SAME POLARITY** before locking the last connector in place.


If you are in doubt, consider soldering your connection instead. There is no substitute for a permanent soldered connection.

VIDEO TUTORIAL:



### Do NOT use Quick Connectors when...

- ✗ You need to connect a pre-soldered joint.



- ✗ Your LED strips might be subjected to movement - as in installations on cars, boats, or other vehicles; or in installations that might be installed or set up several times, such as portable shelving or displays.

- ✗ You have a large number of connections to make - particularly in installations that require many connections back to back, where one failure would result in the loss of large sections of light.
- ✗ You are installing in tight places - when the added size of the connector would make your LED strip installation difficult or impossible.
- ✗ Your connectors absolutely **MUST NOT** fail - as in connectors installed in hard to reach places, in products or installations you're delivering or shipping to a customer.


## LEDtape Outdoor Series IP68

INSTRUKTIONER  
INSTRUCTIONS  
ANLEITUNG  
ISTRUZIONI  
INSTRUCCIONES




### INSTALLATION

1

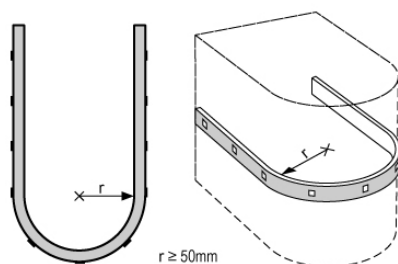

Never bend the LEDtape at a radius smaller than 50 mm.

2

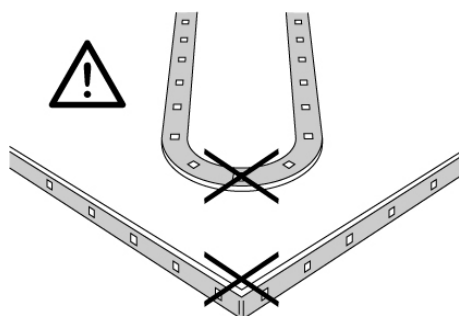


Assembly must not damage or destroy conducting paths on the PCB.

3

#### Perform the Pre-connection Checklist:


- ✓ Maximum length connected in series:  
→ Datasheet | Wiring
- ✓ Polarity and Cable Colour Coding:  
→ Datasheet | Wiring
- ✓ Maximum length per driver:  
→ Datasheet | Digital Dimmable Drivers

4

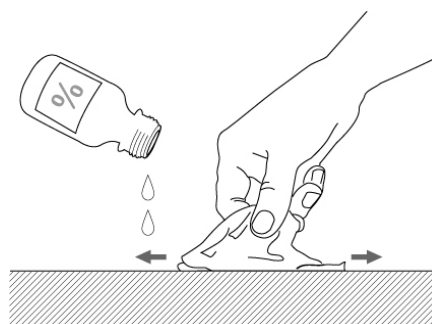


The fixing/cooling surface must be properly cleaned to remove grease, dirt and silicon before application, e.g. using Isopropyl alcohol.

5

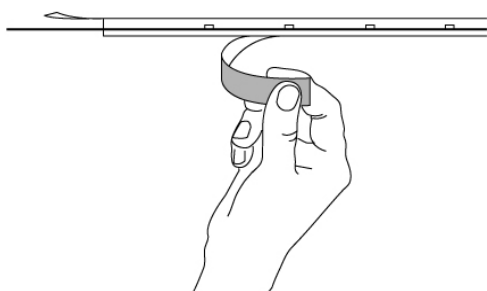

Remove the adhesive tape from the backside and fix the LEDtape on the cleaned fixing/cooling surface.


6

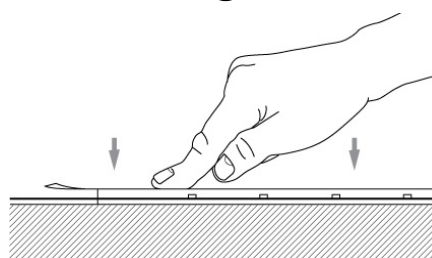

When fixing the LEDtape to a surface, apply an even but gentle pressure and try to avoid applying pressure directly on the LED itself (the maximum allowed pressure is 20 N/cm<sup>2</sup>).


After assembly always check that the entire length has attached properly to the surface and that there is no air pockets underneath.

7

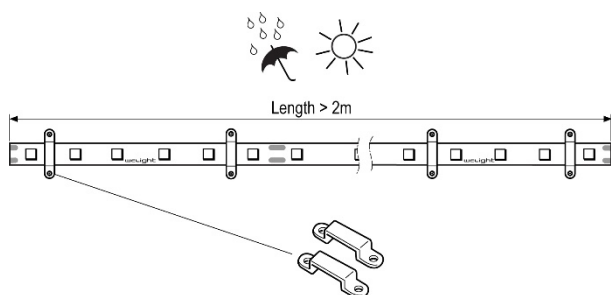

If the total length is longer than 2 meters or when used in environments with large variations in temperature (e.g. outdoor applications) it is recommended to use the included screw mounting clips in addition to the adhesive tape.


8

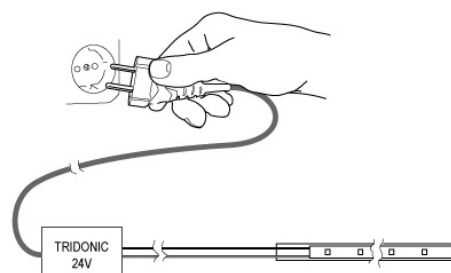

Before you connect the power supply, make sure all cable connections have been properly sealed using weatherproof connectors, e.g. 3M Scotchlok (not included). Always use our approved drivers and controls to power the LEDtape. If the wrong type of driver is used the product warranty is void.







→ Datasheet | Digital Dimmable Drivers

9

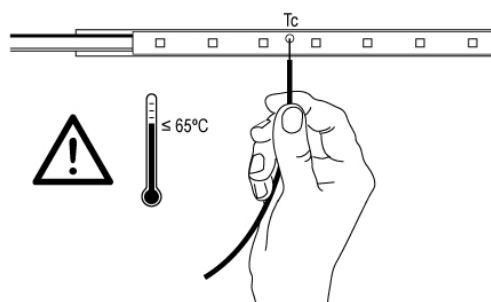


The temperature on the surface of the LEDtape ( $t_c$ ) may under no circumstances be higher than 65 °C if the expected lifetime of the LEDtape is to be met.

## CUT & RE-SEAL

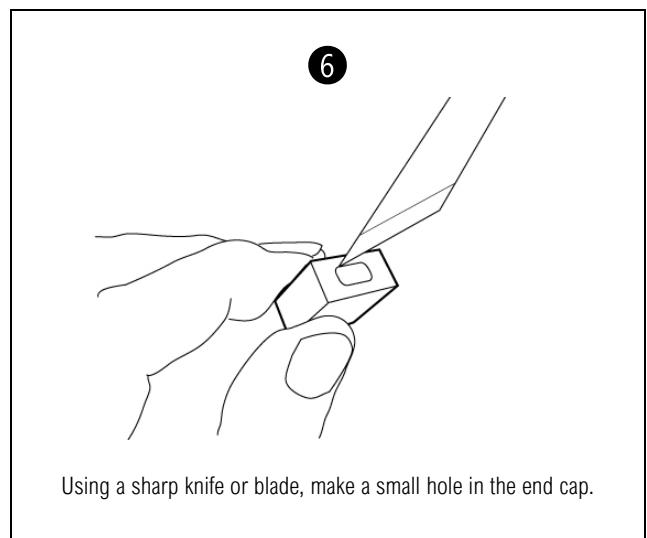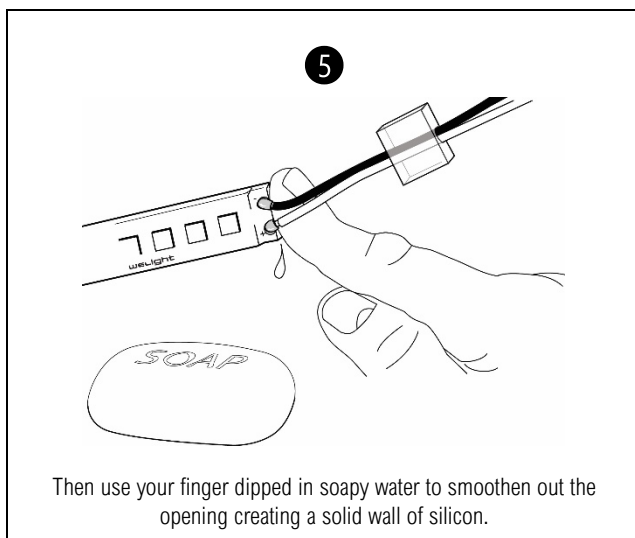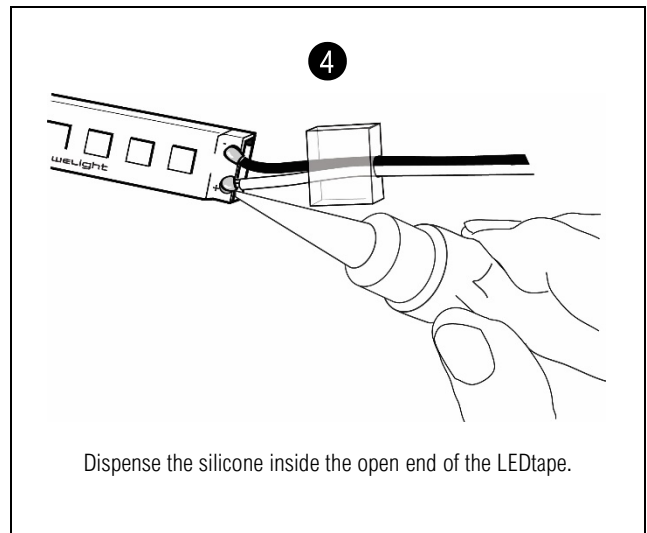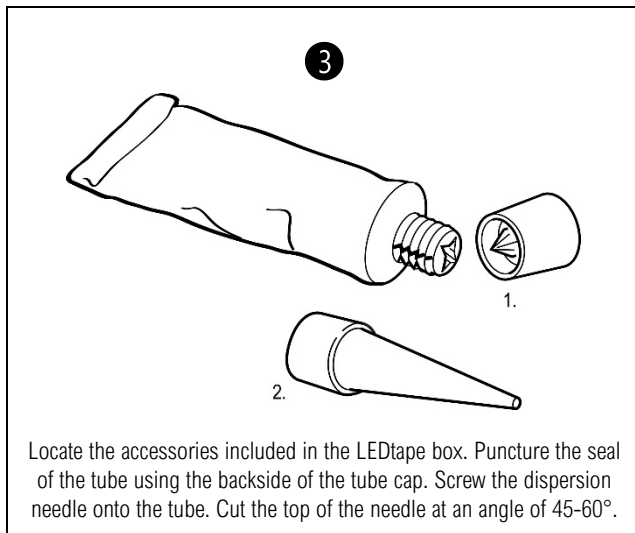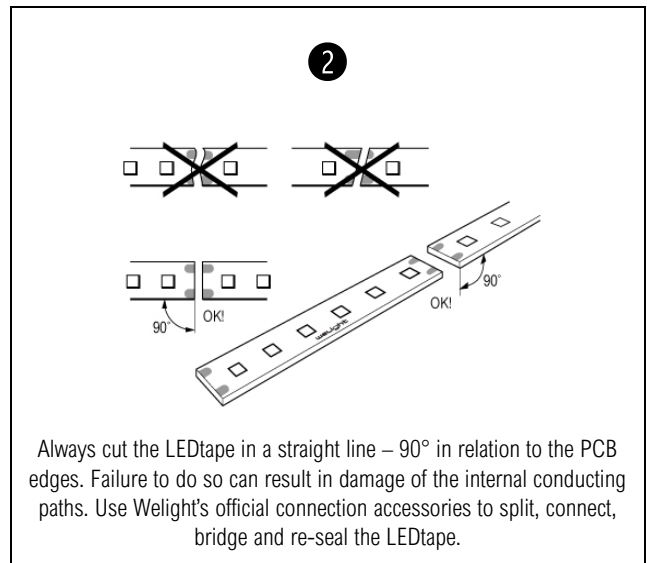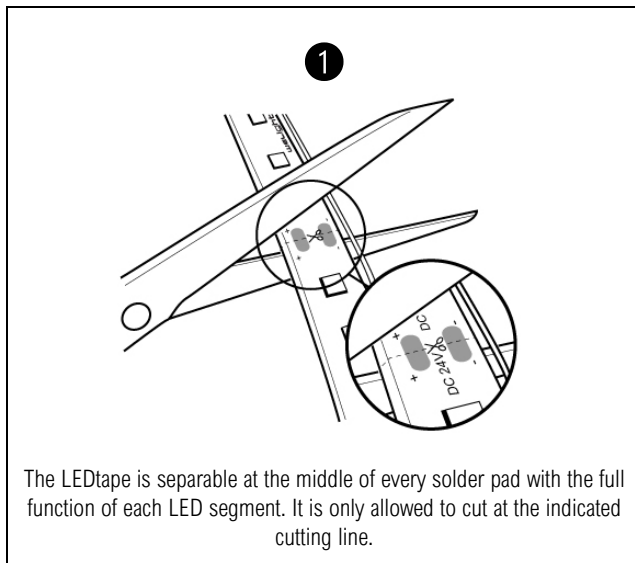


7

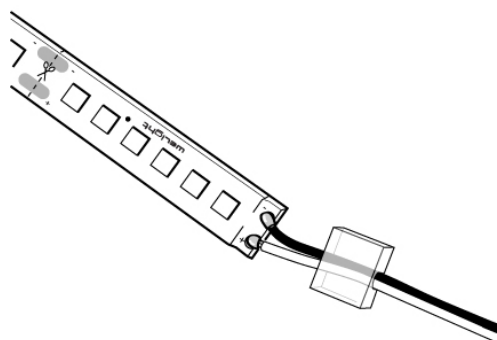


Thread the connection cable through the hole of the end cap.

8

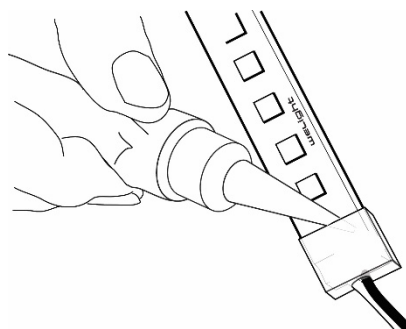


Dispense a small portion of silicon inside the end cap and then slide it into place over the end of the LEDtape. Please wait 60 minutes for the silicone to solidify.

CUT IP68 = IP67

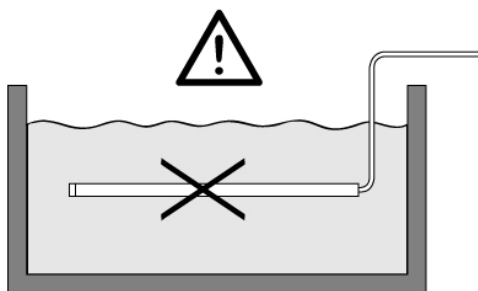

Do not place the re-sealed parts permanently under water! When cut and re-sealed properly the overall protection of the LEDtape will be reduced from IP68 to IP67.

## SOLDERING

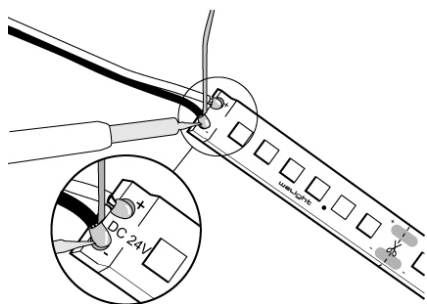

If you need to solder the LEDtape, pre-tin the cables only. Soldering temperature max 300 °C for 4 seconds.

For details on how to solder an IP68 LEDtape, please watch this VIDEO TUTORIAL:



## LEDtape RGB Outdoor Series IP68

KOPPLINGSDON  
CONNECTORS  
VERBINDER  
CONNETTORI  
CONECTORES



### STRIP TO CABLE

1




Cut the LEDtape in the middle of the solder pads.

2




Peel off approx. 1 cm of the adhesive tape from the back of the LEDtape.

3




Position the connector sleeve to match the LEDtape with the hole facing upwards.

4

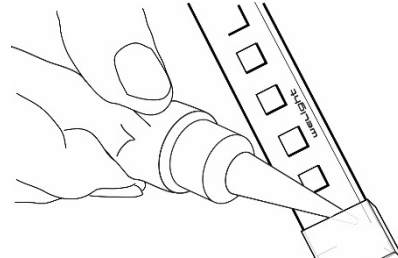


Use the included Silicon Tube to dispense silicon around the end of the LEDtape to facilitate the insertion into the connector sleeve.

5




Push the lubricated end of the LEDtape all the way into the sleeve.

6

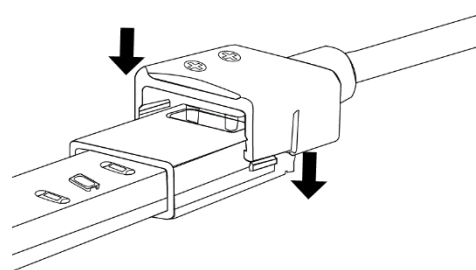


Put the cable connector on top of the sleeve and push downwards. Make sure you **match the POLARITY** of the LEDtape with the connector before locking the connector in place.

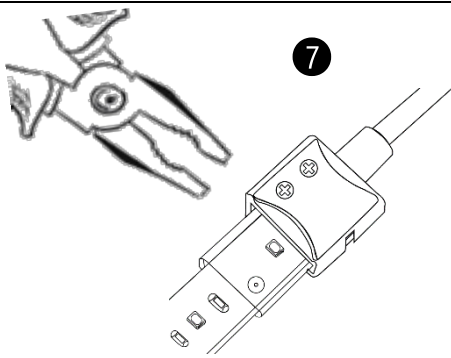

Use a pair of flat pliers to press down on each side of the cap until they lock in position. A "CLICK" can be heard when the pins are locked.

### LEDtape IP68 + Connectors = IP67

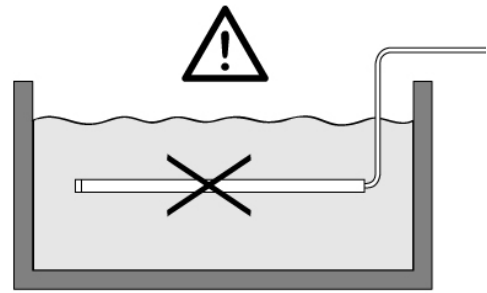

Do not use connectors permanently under water! When using connectors, the overall protection of the LEDtape will be reduced from IP68 to IP67.


## STRIP TO STRIP

1




Cut the LEDtape in the middle of the solder pads.

2




Peel off approx. 1 cm of the adhesive tape from the back of the LEDtape.

3




Position the connector sleeves to match both ends of the LEDtape with the holes facing upwards.

4

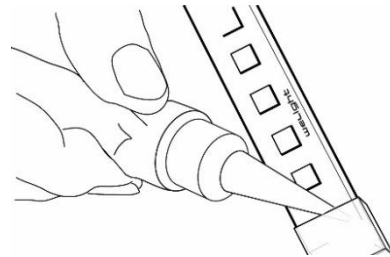


Use the included Silicon Tube to dispense silicon around the ends of the LEDtape to facilitate the insertion into the connector sleeves.






Push the lubricated ends of the LEDtape all the way into the sleeves.




Put the bridge connector on top of the sleeves and push downwards. Make sure you **match the POLARITY** of the LEDtape with the connector before locking the bridge connector in place.

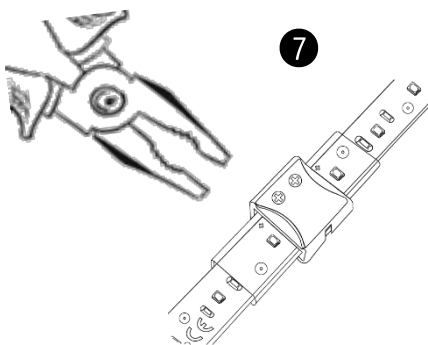

Use a pair of flat pliers to press down on each side of the cap until they lock in position. A "CLICK" can be heard when the pins are locked.


**LEDtape IP68 + Connectors = IP67**

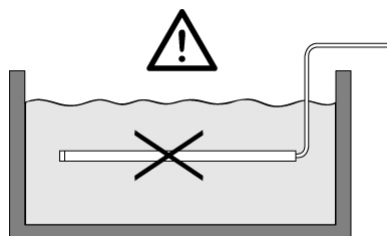

Do not use connectors permanently under water! When using connectors, the overall protection of the LEDtape will be reduced from IP68 to IP67.

**Do NOT use Quick Connectors when...**

- × You need to connect a pre-soldered joint.



- × Your LED strips might be subjected to movement - as in installations on cars, boats, or other vehicles; or in installations that might be installed or set up several times, such as portable shelving or displays.

- × You have a large number of connections to make - particularly in installations that require many connections back to back, where one failure would result in the loss of large sections of light.
- × You are installing in tight places - when the added size of the connector would make your LED strip installation difficult or impossible.
- × Your connectors absolutely **MUST NOT** fail - as in connectors installed in hard to reach places, in products or installations you're delivering or shipping to a customer.

If you are in doubt, consider soldering your connection instead. There is no substitute for a permanent soldered connection.

VIDEO TUTORIAL:



## SAFETY INSTRUCTIONS

- EN** Read these instructions carefully before starting the installation and save for future reference. All connections to the device must be made by a qualified electrician or person with the necessary expertise in electrical installation in accordance with relevant rules and standards. Make sure that the mains voltage is disconnected before installation or maintenance.
- SE** Läs dessa instruktioner innan installationen påbörjas och lämna dem vidare till brukaren av anläggningen. All anslutning till enheten får endast utföras av behörig elektriker eller person med kännedom om elektrisk installation i enlighet med gällande regler och standard. Se till att spänningen är frånslagen före installation eller underhåll.
- FI** Lue nämä ohjeet ennen asentamista ja luovuta ohjeet valaisimen seuraavalle käyttäjälle. Kytkenät ohjaimen saa tehdä ainoastaan pätevä sähköasentaja tai sähköasennukset hallitseva henkilö voimassa olevien määräysten ja standardien mukaisesti. Varmista, että jännite on kytketty päältä ennen asennusta ja huoltoa.
- NO** Les disse instruksjonene før du starter installeringen, og gi den deretter videre til anleggets bruker. All tilkobling til enheten skal utføres av godkjent elektriker eller person med nødvendig kunnskap om elektrisk installasjon i henhold til gjeldende forskrifter og standard. Sørg for at strømmen er koblet fra før installering og ved vedlikehold.
- DK** Læs disse anvisninger før du starter installationen og aflever vejledningen til anlæggets bruger. Alle tilslutninger på enheden skal udføres af en autoriseret elinstallatør i overensstemmelse med gældende regler og standarder. Afbryd spænding før installation og vedligeholdelse.