

RoHS

### TALEXmodule EM-ES 08/10/12 Mk2 EM-LED light sources

#### Product description

- Lighting module with 8, 10 or 12 LEDs
- For use in escape route signs
- Compatible with EM powerLED 1 W & 2 W

#### Properties



- Suitable for Tridonic EM powerLED emergency lighting units
- For permanent and standby operation
- Wide 120° distribution of light for uniform illumination
- Operation on a constant current source
- Replacement for 8 W T5 fluorescent lamp
- Several options for uniform light distribution
- Can be interconnected to create longer strips
- Low energy consumption
- Long life thanks to low operating temperature
- Provides a maintenance-free escape sign system
- Simple mounting/installation
- Push-in terminals for simple and quick wiring

#### Note

Separate status LED required

#### Technische Daten

Ambient temperature ta <sup>③</sup>	-30 ... +55 °C
Typ. tc point <sup>④</sup>	60 °C
Typ.luminous flux at 25 °C <sup>① ③</sup>	130 lm
Max. forward current <sup>②</sup>	600 mA
Min. forward voltage <sup>①</sup>	2.7 V
Typ. forward voltage at 25 °C <sup>①</sup>	3.0 V
Max. forward voltage <sup>①</sup>	3.2 V
Typ. power <sup>① ③</sup>	1.05 W
Colour rendering index CRI	80
Beam characteristic	120°
Risk group (EN 62471:2008)	0
Type of protection	IP00

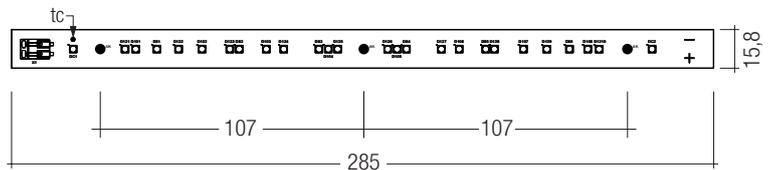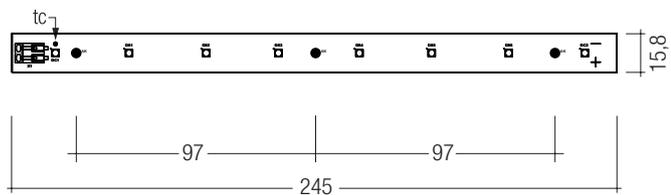

#### Ordering data

Type	Article number	Colour	Colour temperature	Packaging, carton	Packaging, pallet	Weight per pc.
<b>8 light points per module</b>						
ES 08 246 Mk2	89800249	Daylight white	6,500 K	25 pc(s).	600 pc(s).	0.014 kg
ES 08 285 Mk2	89800250	Daylight white	6,500 K	25 pc(s).	600 pc(s).	0.016 kg
<b>10 light points per module</b>						
ES 10 285 Mk2	89800251	Daylight white	6,500 K	25 pc(s).	600 pc(s).	0.017 kg
<b>12 light points per module</b>						
ES 12 285 Mk2	89800248	Daylight white	6,500 K	25 pc(s).	600 pc(s).	0.018 kg



Standards, page 3

**Specific technical data**

Typ	Article number	Total length	Hole spacing D
ES 08 246 Mk2	89800249	245 mm	97 mm
ES 08 285 Mk2	89800250	285 mm	107 mm
ES 10 285 Mk2	89800251	285 mm	107 mm
ES 12 285 Mk2	89800248	285 mm	107 mm

③ Tolerance range for optical and electrical data: ±15 %

④ Exceeding the max. operating current leads to an overload on the TALEX(module). This may in turn result in a significant reduction in life-time or even destruction of the TALEX(module).

⑤ Data for operation with 350 mA.

⑥ If the max. temperature limits are exceeded, the life of the module will be reduced or the module may be damaged. The temperature of the TALEX(module) at the tc-point is to be measured in the thermally stable state. For tc-point see the above diagram.

RoHS

ACCES-  
SORIES

**Status indication green LED**

**Product description**

- A green LED indicates that charging current is flowing into the battery



**Ordering data**

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
LED EM green	89899605	25 pc(s).	200 pc(s).	0.017 kg
LED EM green, high brightness	89899756	25 pc(s).	200 pc(s).	0.012 kg

RoHS

ACCES-  
SORIES

## Status indication bi-colour LED

### Product description

- Two-colour status display LED
- Green: system OK, red: fault



### Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
LED EM bi-colour	89899720	25 pc(s).	200 pc(s).	0.017 kg
LED EM bi-colour, high brightness	89899753	25 pc(s).	200pc(s).	0.013 kg

### Standards

- EN 62031
- EN 62471

### Thermal design and heat sink

The rated life of TALEX products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the TALEX(module EM-ES will be greatly reduced or the TALEX(module EM-ES may be destroyed.

### tc point, ambient temperature and life-time

The temperature at tp reference point is crucial for the light output and life-time of a TALEX product.

### Operating unit

EM powerLED 1 – 2 W (see separate data sheet)

## Precautions in Handling

### Safety Precautions

The LED light output is intense enough to cause injury to human eyes if viewed directly. Precautions must be taken to avoid looking directly at the LEDs with unprotected eyes [according IEC 60825-1 (EN 60825-1)].

The TALEX(modules EM-ES are delivered in an ESD protected packaging.

### Precaution in driving

Products are designed exclusively for forward current driving. Please avoid driving system with reverse voltage, which may cause migration which damages the product.

Reverse polarity and secondary switching can damage the TALEX(module).

### Cleaning

Chemical solvents or cleaning agents must not be used to clean the LED component.

Mechanical stress on the LED component must be avoided. It is best to use a soft brush, damp cloth or low-pressure compressed air.

### Storage

The products should be stored away from direct light in dry location.

The LEDs should be kept at 30 °C or less and 70 % RH or less. Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation could occur.

### Mounting instruction



None of the components of the TALEX(module EM-ES (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.


The LED modules are mounted with 4 screws per module.

In order not to damage the modules only rounded head screws and an additional plastic flat washer should be used.

Fixing can be achieved using M4 plastic screws or M4 plastic rivets through the holes provided or alternatively by appropriate adhesive pads positioned in the fixing areas.

### Wiring type and cross section

The wiring can be solid cable with a cross section of 0.2 to 0.75 mm<sup>2</sup>. For the push-wire connection you have to strip the insulation (6–7 mm).



Inserting stranded wires / removing wires by lightly pressing on the push button.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate. Avoid corrosive atmosphere during usage and storage.



### EOS/ESD safety guidelines


The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline\_EOS\_ESD.pdf) at: <http://www.tridonic.com/com/en/technical-docs.asp>

## Precautions for safe operation

The operating unit must be SELV classified or else the circuit board must be insulated by the luminaire.

① For further technical information particularly with regard to the installation of TALEX modules please refer to [www.tridonic.com](http://www.tridonic.com)

Wiring example for one LED strip

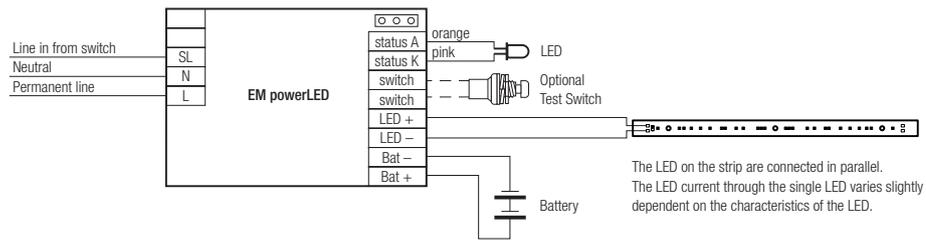

Wiring example for two LED strips connected in series

