


TALEXconverter 0025 K220 8/12/24V
Constant voltage converter

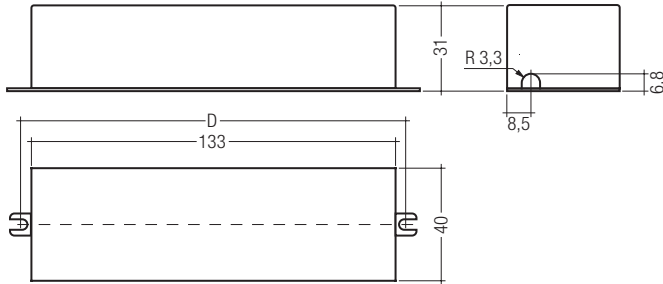

- constant voltage converter for TALEX modules
- wide supply voltage range 100–300V
- constant output voltage
- over load protection with power reduction
- over temperature protection with power reduction
- short-circuit switch-off with automatic restart

- protection rating IP 67
- connection cable with wire end ferrules
secondary: + red / – black
length: approx. 500 mm
- white metal housing – potted
- UL approved

Packaging:
box of 24

Designed according to:
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

type		TALEXconverter 0025 K220 8V	TALEXconverter 0025 K220 12V	TALEXconverter 0025 K220 24V
article number		86455943	86455990	86456003
primary voltage	V _{AC}	100/230/277	100/230/277	100/230/277
primary voltage range	V _{AC}	90-300	90-300	90-300
primary voltage range	V _{DC}	110-300	110-300	110-300
input current at 230V 50Hz	A	0.12	0.12	0.12
frequency	Hz	0/50/60	0/50/60	0/50/60
efficiency	%	> 80	> 80	> 82
secondary voltage	V _{DC}	8	12	24
output power	W	25	25	25
ambient temperature t _a	°C	-25 → +50	-25 → +50	-25 → +50
max. case temperature t _c	°C	90	90	90
weight	g	300	300	300
dimensions LxWxH	mm	133x40x31	133x40x31	133x40x31
fixing centres (D)	mm	142	142	142